

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number
WO 2004/040294 A1

(51) International Patent Classification⁷: G01N 30/00

(21) International Application Number:
PCT/IB2003/004904

(22) International Filing Date: 22 October 2003 (22.10.2003)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
MI2002A 002310 30 October 2002 (30.10.2002) IT

(71) Applicant (for all designated States except US):
THERMO ELECTRON S.p.A. [IT/IT]; Strada Rivoltana, I-20090 Rodano (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ZILIOI, Giacinto [IT/IT]; Via Don Milani, 21/B, I-20063 Cernusco sul Naviglio (IT). FACCHETTI, Riccardo [IT/IT]; Via Paolo VI, 29, I-23900 Lecco (IT). MAGNI, Paolo [IT/IT]; Via S. Antonio, 2, I-20045 Besana in Brianza (IT).

(74) Agent: MARIETTI, Giuseppe; Marietti, Gislon e Trupiano S.r.l., Via Larga, 16, I-20122 Milan (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(48) Date of publication of this corrected version:


21 October 2004

(15) Information about Correction:

see PCT Gazette No. 43/2004 of 21 October 2004, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CHROMATOGRAPHY COLUMN ASSEMBLY

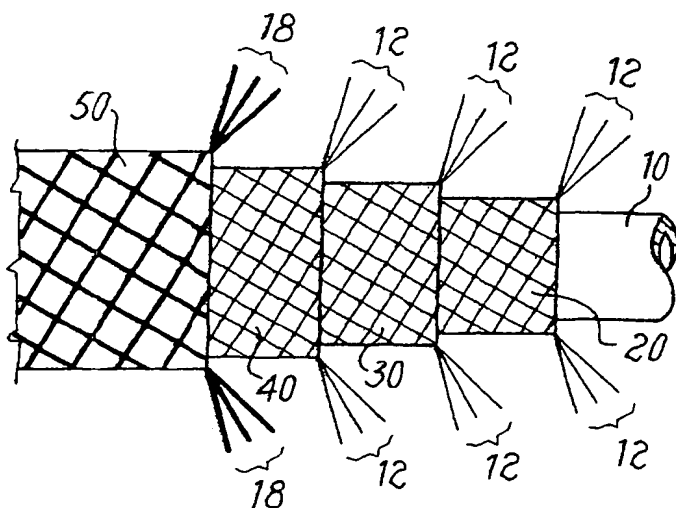

(57) Abstract: A chromatography column assembly of the direct heating type, comprising at least a capillary column, at least a tubular structure which envelops the capillary column and is coaxial with it, means to directly heat the column, means to detect the temperature of the column and one or more electrically insulating covering elements, wherein the tubular structure comprises a plurality of tubular meshes each formed of a plurality of filaments woven together.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number
WO 2004/040294 A1

(51) International Patent Classification⁷: **G01N 30/00**

(21) International Application Number:
PCT/IB2003/004904

(22) International Filing Date: 24 October 2003 (24.10.2003)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
MI2002A 002310 30 October 2002 (30.10.2002) IT

(71) Applicant (for all designated States except US):
THERMO FINNIGAN ITALIA S.p.A. [IT/IT]; Strada
Rivoltana, I-20090 Rodano (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZILIOLI, Giacinto**
[IT/IT]; Via Don Milani, 21/B, I-20063 Cernusco sul Nav-
iglio (IT). **FACCHETTI, Riccardo** [IT/IT]; Via Paolo VI,
29, I-23900 Lecco (IT). **MAGNI, Paolo** [IT/IT]; Via S. An-
tonio, 2, I-20045 Besana in Brianza (IT).

(74) Agent: **MARIETTI, Giuseppe**; Marietti, Gislon e Trupi-
ano S.r.l., Via Larga, 16, I-20122 Milan (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: CHROMATOGRAPHY COLUMN ASSEMBLY

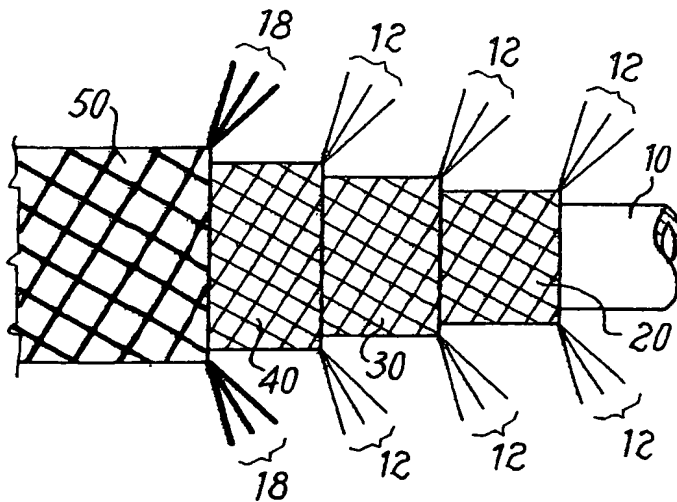

(57) Abstract: A chromatography column assembly of the direct heating type, comprising at least a capillary column, at least a tubular structure which envelops the capillary column and is coaxial with it, means to directly heat the column, means to detect the temperature of the column and one or more electrically insulating covering elements, wherein the tubular structure comprises a plurality of tubular meshes each formed of a plurality of filaments woven together.

WO 2004/040294 A1

Title: "CHROMATOGRAPHY COLUMN ASSEMBLY"

The present invention relates to a chromatography column and, in particular a chromatography column assembly of the direct heating type.

5 In the prior art various examples of chromatography columns are known designed for direct heating by means of conductive elements to which electrical power is applied in a controlled way in the attempt to obtain the desired temperatures.

Patent no. US-A-5,611,846 by Overton et al. describes a
10 chromatography column assembly with direct heating. This document suggests inserting the capillary column and a conductive filament into an insulating sheath. In practice this solution is subject to phenomena of dispersion and has limits both as regards the maximum length of the column (2-3 meters at the most)
15 and as regards the maximum temperature that can be reached (250°C at the most).

Another example is constituted by the column assembly described in patent no. US-A-5,808,178 in the name of Thermedics. Among the various embodiments illustrated, it suggests inserting a capillary
20 column made of fused silica into a steel tube. The tube is then coated with an insulating sheath made of woven glass fibers. However this embodiment requires high electrical powers (up to 2 kW) to be applied to the steel tube in order to heat the column. This also makes the position of the column inside the tube difficult to
25 reproduce and makes the temperatures dependent on the distance between the column and the wall of the steel tube.

Patent no. US 6,217,829 by Mustacich et al. describes a column

assembly with heating wires and sensors which , to overcome the limits of the Overton solution, are wound tightly in a spiral forming a kind of toroidal shaped pack insulated towards the outside. Due to the casual arrangement of the heating wires in the packing, excessive heatings may occur in specific points of the column, just as in other points the temperature may be lower than that desired. In the same way, temperature detection along the entire column is influenced by the casual distribution of the conductive filaments foreseen for this purpose. This technology is complex and costly to produce. Moreover, the non-uniformity of thermal dispersions between the "core" and the outer surface of the assembly may cause non-uniformity of the temperature in the section of the toroid. Another example of a known type of column assembly is described in the international patent application n. WO 02/40988 in the name of the Applicant.

The column assembly described in this prior art document comprises a capillary column and a single element in an electrically conductive material placed in contact with it. The electrically conductive element is constituted in particular by a plurality of filaments in electrically conductive materials that are woven together to form a tubular mesh that envelops the capillary column. The conductive element produced in this way, which may have filaments in different electrically conductive materials, is used both to heat the column, supplying electrical power to its ends, and to detect the instantaneous temperature of the column by measuring an electrical quantity at its ends.

The assembly constituted by the column and by the electrically

conductive tubular mesh is then covered with an outermost tubular mesh, produced by weaving together filaments in electrically insulating material.

From the theoretical point of view, this solution offers considerable advantages compared to the direct heating systems mentioned above, but may not be very versatile from a practical point of view.

In fact, it is often necessary to obtain columns of pre-established length with conductive elements having specific electrical properties, for example overall resistance, specific linear resistance and the like. For example, the resistance range of the conductive elements of the column must be established according to the control system. This means that it is necessary to appropriately choose the conductive material to be used, or the diameter of the filaments to be woven to obtain the desired conductive element associated with the column of pre-established length.

Nonetheless, the need to obtain these specific electrical characteristics or properties may also require the use of filaments produced with conductive materials that are not easily workable, or the use of conductive filaments whose diameter is not particularly suitable to be woven or not particularly suitable to provide the finished product with specific dimensions and/or mechanical resistance.

The task of the present invention is therefore to provide a chromatography column assembly and in particular a column assembly of the direct heating type, which allows the drawbacks of prior art to be overcome.

Within the scope of this task, an object of the present invention is to

propose a column assembly of the direct heating type that can be adapted to a wide range of needs with regard to the electrical properties and characteristics of the electrically conductive elements associated with the column.

- 5 Another object of the present invention is to propose a column assembly of the direct heating type that can be easily adapted to satisfy particular requirements with regard to the characteristics of workability, production economy, dimensions, mechanical resistance, flexibility and the like.
- 10 A further object of the present invention is to propose a column assembly of the direct heating type that may be used with different temperature control systems.

These objects are attained by the present invention, which relates to a chromatography column assembly, of the type comprising at
15 least a capillary column and at least a tubular structure which envelops the capillary column and is coaxial with it, the tubular structure comprising means to directly heat the column, means to detect the temperature of the column and one or more electrically insulating covering elements, characterized in that the tubular
20 structure comprises a plurality of tubular meshes each formed of a plurality of filaments woven together.

The possibility of using several coaxial tubular meshes facilitates the production of column assemblies according to the present invention, for example as regards the type of material with which
25 the electrically conductive filaments are produced and/or their diameter.

According to an advantageous aspect of the present invention,

one or more conductive meshes may be produced by weaving together electrically conductive filaments and electrically insulating filaments. This offers the advantage of allowing column assemblies with the desired characteristics of dimensions and mechanical resistance to be produced with the same technique.

The covering elements in electrically insulating material may also be produced with the same technique, that is in tubular form with filaments in electrically insulating material woven together, or may be formed of continuous sheaths in materials with the suitable characteristics of electrical insulation and resistance to high temperatures.

According to needs, the insulating covering elements may form the outermost tubular mesh of the plurality of coaxial tubular meshes, or at least one of the covering elements in electrically insulating material may be interposed between at least two electrically conductive coaxial tubular meshes. In this case it is possible to obtain particular configurations, for example column assemblies in which the heating conductive means may be separate from the conductive means destined to detect the temperature.

In the case in which the capillary column is produced in electrically conductive material, such as metal or the like, one or more insulating covering elements may be interposed between the capillary column and the remaining electrically conductive coaxial tubular meshes.

In general, the chromatography column assembly according to the present invention offers great flexibility as it allows in any case the desired electrical characteristics to be obtained always using

conductive filaments made of the same material and with the same diameter. The production technology is thus further simplified, with considerable advantages also as regards production costs.

Another aspect of the present invention provides a method to produce a chromatography column assembly of the direct heating type. For a certain length L of the capillary column, the resistance R1 of the heating means of the column and/or the resistance R2 of the means to detect the temperature of the column are determined by weaving together a pre-established number of filaments in electrically conductive material to form one or more electrically conductive tubular meshes coaxial with the column.

Once the length L of the capillary column has been established, it is possible to set the resistance most suitable for the function performed by each of the electrically conductive means, for example by producing several tubular conductive meshes in contact with one another by means of conductive filaments of the same material and of the same diameter.

To obtain the desired values of electrical resistance of each conductive means, one or more meshes may be produced by weaving together mixed filaments, that is electrically conductive filaments and electrically insulating filaments.

Advantageously, this makes it possible to use conductive filaments of the same material and of the same diameter for all the tubular meshes, thus offering, as well as greater production flexibility, also the aforesaid advantages of simplicity and economy in the production phase.

Naturally, it would also be possible to produce any of the tubular

meshes by weaving together conductive and/or insulating filaments of different diameters. In the same way, each mesh may be produced with filaments having a diameter different from the diameter of the filaments of any other mesh.

- 5 Further characteristics and advantages of the present invention shall become apparent from the description hereunder with reference to the accompanying schematic drawings, in which:
- Figure 1 is a sectional view of a possible embodiment of the column assembly according to the present invention;
 - 10 - Figure 2 shows the composition of the column assembly in Figure 1;
 - Figure 3 shows the composition of a column assembly according to another possible embodiment of the present invention;
 - Figures 4 and 5 are cross sectional views of other embodiments of a column assembly according to the present invention;
 - 15 - Figure 6 is a sectional view of another embodiment of the column assembly according to the present invention;
 - Figure 7 shows the composition of the column assembly in Figure 6;
 - Figure 8 is a sectional view of yet another embodiment of the column assembly according to the present invention;
 - 20 - Figure 9 shows the composition of the column assembly in Figure 8;
 - Figure 10 is a sectional view of an alternative embodiment of the column assembly according to the present invention; and
 - Figure 11 shows the composition of the column assembly in Figure 10.
- 25 In the illustrations described schematically hereunder, the electrically conductive meshes are represented in section with a dashed line that is thicker than the one representing the insulating

covering elements, while in the views illustrating the compositions of the column assemblies the filaments in electrically conductive material are represented with a dashed line that is thinner than the one representing the filaments in electrically insulating material.

- 5 The column assembly represented in Figures 1 and 2 comprises a capillary column 10, produced for example in fused silica or another electrically insulating material, on which is woven a plurality of electrically conductive coaxial tubular meshes 20, 30 and 40, each formed of a plurality of filaments woven together. On the
10 outside, the assembly thus formed is provided with an electrically insulating covering element 50, also tubular in shape and coaxial with the column 10 and with the electrically conductive tubular meshes 20, 30 and 40.

In this embodiment, all the electrically conductive tubular meshes
15 20, 30 and 40 are produced by weaving together filaments 12 in electrically conductive material, for example nickel and its alloys, or any other metallic or non-metallic electrically conductive material, suitable to be woven to form a tubular mesh.

The tubular meshes 20, 30 and 40 are preferably placed in close
20 contact with one another and, in particular the innermost tubular mesh is preferably placed in close contact with the outer surface of the column 10, although without being integral with each other. This allows absorption of the various thermal deformations to which the tubular meshes are subject in relation to the column, while making
25 heat exchange between the electrically conductive elements 20, 30, 40 and the column more efficient and rapid.

The electrically insulating covering element 50 is represented here

as a tubular mesh placed in close contact with the conductive tubular meshes 20, 30 and 40 and obtained by weaving together filaments 18 in electrically insulating material, for example ceramic fibers, glass fibers, or other electrically insulating materials particularly resistant to heat and suitable to be woven to form a tubular mesh. Alternatively, the electrically insulating covering element 50 may also be constituted by a tubular insulating sheath, for example made of polyamide or the like.

Figure 3 shows a column assembly in which some of the conductive tubular meshes are produced by weaving together mixed filaments, some electrically conductive and others electrically insulating. In fact, besides the tubular mesh 20, produced entirely with filaments 12 in electrically conductive material, in this case two tubular meshes 60 and 70 are also provided, produced by weaving together electrically conductive filaments 12 and electrically insulating filaments 18.

The number, composition and arrangement of the electrically conductive tubular meshes 20, 60 and 70 may in any case vary in respect of those illustrated. For example, the tubular mesh 20 could also be produced with mixed filaments and all the meshes could have the same composition of conductive and insulating filaments. The covering element 50 in electrically insulating material in this case is also illustrated in the form of a tubular mesh formed of filaments 18 in electrically insulating material, although it can also be made in this case of a tubular sheath.

For example, in the section shown in Figure 4, the column assembly formed of the column 10 and of two electrically conductive tubular

meshes 20 and 30, is enclosed in an electrically insulating covering 80 with a slightly larger diameter than the external diameter of the tubular mesh 30. This makes it possible to form a cavity 83 in which a heat-exchange fluid may circulated. In this case the tubular covering 80 is preferably formed of a continuous tubular film waterproof to the circulating fluid rather than of a tubular mesh, or may also be a tubular mesh, in turn covered with a waterproofing material.

In the sectional view in Figure 5, the same column assembly of Figure 4 also includes an electrically insulating covering 50, produced in the form of tubular mesh, placed in close contact with the outermost conductive tubular mesh 30. Between the external sheath 80 and the insulating covering 50 there is once again a cavity 85 for circulation of a heat-exchange fluid.

An electrically insulating tubular element 50 or 80, which envelops the outermost conductive mesh, allows, according to custom, the column assembly to be wound in coils without giving rise to short circuits or unwanted electrical contacts between the conductive elements of the column assembly.

In the embodiments illustrated above, with reference to Figures 1 to 5, the electrically conductive tubular meshes are used both as means to directly heat the column 10 and as means to detect the temperature of the column.

Alternatively, one or more of the conductive tubular meshes may be used for direct heating of the column, while one or more of the others may be used to detect the temperature of the column. This allows conductive materials that guarantee optimal characteristics

to be chosen both for the heating element and for the temperature sensor.

An example of a column assembly produced in this way is shown in Figures 6 and 7, wherein the column 10 is surrounded by a first
5 electrically conductive mesh 20 and is separated from another electrically conductive mesh 30 by a tubular mesh 90 produced with electrically insulating materials. The two conductive elements 20 and 30 are thus electrically insulated from each other and may be used independently to heat the column or to detect the
10 temperature. Naturally, the number of tubular meshes may also be greater in respect of the number shown and two or more meshes may be also be used for each function. The insulating mesh 90 too may be covered by an electrically insulating material to improve the electrical insulation between the separated conductive
15 elements.

Figures 8 and 9 show a column assembly in which the capillary column 100 is produced in electrically conductive material, such as a metal or the like. In this case, the column 100 is electrically insulated in respect of the conductive meshes 20 and 30 by
20 interposing a mesh 90 in electrically insulating material.

The tubular meshes may be used both to heat the column 100 directly and to detect the temperature. Nonetheless, the electrical conductivity of the column 100 could also be used to produce one of the two functions (heating or detecting the temperature of the
25 column), while the other function could be performed by the tubular meshes 20 and 30.

Figures 10 and 11 show an alternative embodiment that makes it

possible to obtain the objects of the present invention. The column assembly represented here comprises a single electrically conductive tubular mesh 110 formed of a mesh of filaments 12 in electrically conductive material and of filaments 18 in electrically insulating material. In fact, to obtain specific resistance characteristics of the conductive element, it may be necessary to use a quantity of conductive filaments 12 whose number does not allow the formation of a tubular mesh suitable to be woven on the column 10. In this case, filaments 18 in electrically insulating material are used to form an adequate conductive mesh that not only has the desired electrical characteristics but also the desired mechanical properties of the mesh.

Various modifications may be made without departing from the scope of the present invention, For example, each of the conductive and/or insulating tubular meshes may be produced both with filaments of identical diameter and with filaments with different diameters, and each mesh may be produced with filaments with a diameter different from the diameter of the filaments of any other mesh. Moreover, each of the conductive meshes may be produced with mixed electrically conductive filaments, that is filaments that may be made of different materials or with filaments made of the same electrically conductive material but with different resistivity characteristics.

CLAIMS

1. A chromatography column assembly, of the type comprising at least a capillary column, at least a tubular structure which envelops said capillary column and is coaxial with it, means to directly heat said column, means to detect the temperature of said column and one or more electrically insulating covering elements, characterized in that said tubular structure comprises a plurality of tubular meshes each formed of a plurality of filaments woven together.
2. A chromatography column assembly as claimed in claim 1, characterized in that said means to heat said column and/or said means to detect the temperature of said column comprise at least one electrically conductive tubular mesh formed of filaments in electrically conductive material woven together.
3. A chromatography column assembly as claimed in claim 1, characterized in that said means to heat said column and/or said means to detect the temperature of said column comprise at least one electrically conductive tubular mesh formed at least in part of filaments in electrically conductive material and at least in part of filaments in electrically insulating material woven together.
4. A chromatography column assembly as claimed in claim 1, characterized in that at least one of said one or more electrically insulating covering elements comprise at least a tubular mesh formed of filaments in electrically insulating material woven together.
5. A chromatography column assembly as claimed in claim 1, wherein the innermost mesh of said plurality of coaxial tubular meshes has an inner surface placed in close contact with the outer

surface of said column.

6. A chromatography column assembly as claimed in claim 1, wherein at least one of said electrically insulating covering elements constitutes the outermost tubular mesh of said plurality of coaxial
5 tubular meshes.

7. A chromatography column assembly as claimed in claim 1, wherein at least one of said electrically insulating covering elements constitutes the innermost tubular mesh of said plurality of coaxial tubular meshes.

10 8. A chromatography column assembly as claimed in claim 1, wherein at least one of said electrically insulating covering elements is interposed between at least two coaxial tubular meshes of said plurality of coaxial tubular meshes.

9. A chromatography column assembly as claimed in claim 1,
15 wherein said capillary column is produced in fused silica or another suitable electrically insulating material.

10. A chromatography column assembly as claimed in claim 1, wherein said capillary column is produced in an electrically conductive material, such as a metal or the like.

20 11. A chromatography column assembly as claimed in claim 10, wherein said means to heat said column and/or said means to detect the temperature of said column are constituted by said capillary column in electrically conductive material.

12. A chromatography column assembly as claimed in claim 1,
25 wherein said means to heat said column comprise at least a first of said electrically conductive coaxial tubular meshes and said means to detect the temperature of said column comprise at least a

second of said electrically conductive coaxial tubular meshes, at least a covering element in electrically insulating material being interposed between said first and said second tubular mesh.

13. A method to produce a chromatography column assembly
5 of the direct heating type, wherein said chromatography column assembly comprises at least a capillary column, electrically conductive means to directly heat said column and electrically conductive means to detect the temperature of said column, characterized in that, for a certain length L of said column, at least
10 the resistance R1 of said electrically conductive means to heat said column is determined by weaving together a pre-established number of filaments in electrically conductive material to form one or more electrically conductive tubular meshes coaxial with said column.

14. A method to produce a chromatography column assembly
15 of the type with direct heating, wherein said chromatography column assembly comprises at least a capillary column, electrically conductive means to directly heat said column and electrically conductive means to detect the temperature of said column, characterized in that, for a certain length L of said column, at least
20 the resistance R2 of said electrically conductive means to detect the temperature of said column is determined by weaving together a pre-established number of filaments in electrically conductive material to form one or more electrically conductive tubular meshes
25 coaxial with said column.

15. A method as claimed in claim 13 or 14, wherein one or more meshes of said electrically conductive means comprise filaments in

electrically insulating material woven with said filaments in electrically conductive material.

16. A method as claimed in claim 13 or 14, wherein said electrically conductive means to heat said column coincide with said electrically conductive means to detect the temperature of said column.

17. A method as claimed in claim 13 or 14, wherein said electrically conductive filaments are produced with the same material.

18. A method as claimed in claim 13 or 14, wherein said electrically conductive filaments that form at least one of said one or more meshes all have the same diameter.

19. A method as claimed in claim 13 or 14, wherein said electrically conductive filaments that form said one or more meshes all have the same diameter.

Fig. 1




Fig. 2

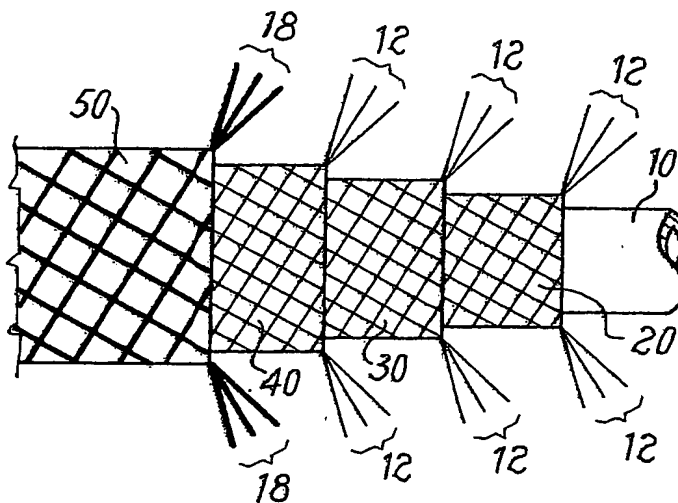


Fig. 3

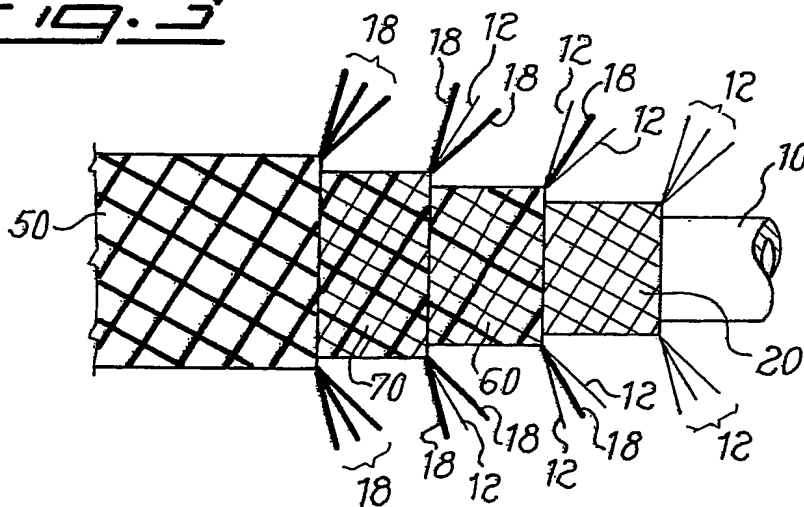


Fig. 4

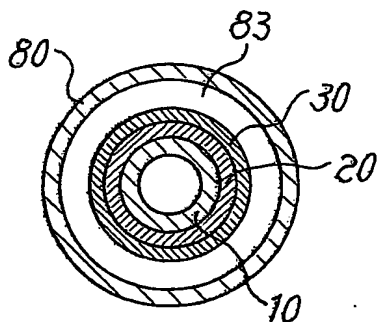


Fig. 5

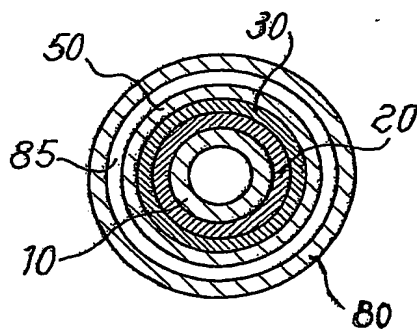


Fig. 6




Fig. 7

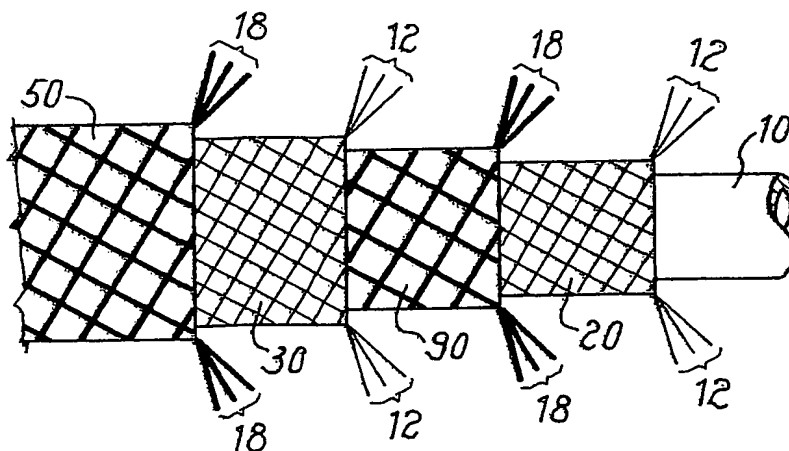


Fig. 8




Fig. 9

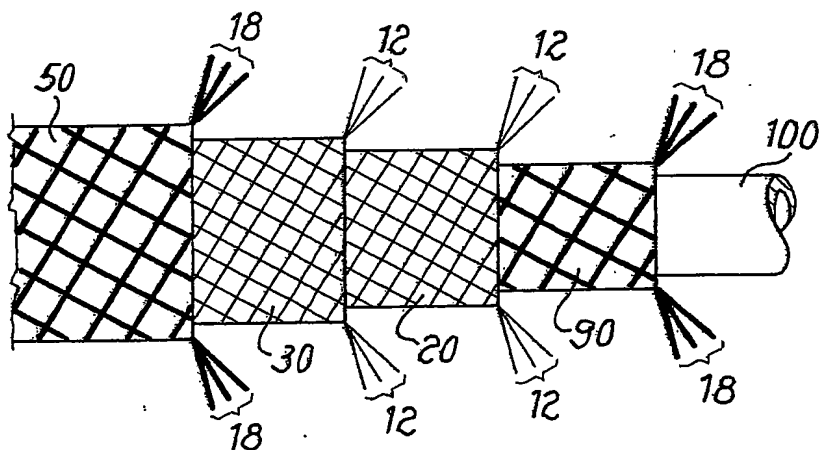


Fig. 10





Fig. 11

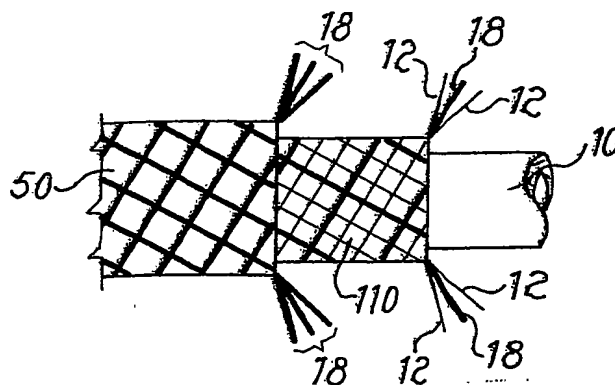

INTERNATIONAL SEARCH REPORT

International Application No

IB 03/04904

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01N30/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02/40988 A (MAGNI PAOLO ;FACCHETTI RICCARDO (IT); THERMO FINNIGAN ITALIA S P A) 23 May 2002 (2002-05-23) cited in the application the whole document	1-19
A	US 5 589 630 A (WIEGAND PATRICK M ET AL) 31 December 1996 (1996-12-31) column 11, line 5-31	1-19
A	US 4 726 822 A (CATES MARION H ET AL) 23 February 1988 (1988-02-23) column 1, line 51-66	1,13,14
A	EP 0 310 867 A (SHIMADZU TECHNO RESEARCH INC) 12 April 1989 (1989-04-12) page 7, line 26,27	1,13,14

☐

Further documents are listed in the continuation of box C.

☒

Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

15 April 2004

Date of mailing of the international search report

22/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Müller, T

INTERNATIONAL SEARCH REPORT

International Application No

IB 03/04904

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 0240988	A	23-05-2002	IT	MI20002449 A1	15-05-2002
			EP	1238271 A1	11-09-2002
			WO	0240988 A1	23-05-2002
			US	2003053800 A1	20-03-2003

US 5589630	A	31-12-1996	US	5437179 A	01-08-1995
			CA	2127522 A1	08-01-1995
			EP	0633469 A2	11-01-1995
			JP	2960856 B2	12-10-1999
			JP	7151740 A	16-06-1995

US 4726822	A	23-02-1988	NONE		

EP 0310867	A	12-04-1989	JP	1094260 A	12-04-1989
			CN	1032457 A	19-04-1989
			EP	0310867 A2	12-04-1989
